

type: SWAGE ALUMINUM PORTABLE FLAGPOLE

version: STANDARD

Swage flagpoles are made of 2 or more tubes of 50mm diameter joined together by putting one into another

Flag display:
The flag display depends on gusts of wind.



Flag fixing:
rope and hooks
(attached to the flag)

Hoisting and lowering of the flag:
using an external rope fixed to the belying cleat mounted 1,5m above the ground



ALUMINIUM FLAGPOLE

TUBE PROFILE
Swage aluminium

ANODIZING:
20 microns

WALL THICKNESS:
2 mm




AVAILABLE ACCESSORIES

FINIALS		WEIGHT [kg]
1	Plastic cap	0,06
2	Rotating truck head	0,21
3	Golden bulb/round finial (brass)	0,22
4	Silver bulb/round finial (aluminum)	0,16
5	Black mushroom shaped top (plastic)	0,142
6	Aluminum flat top fi 75	0,185



HALYARD SYSTEM		WEIGHT [kg]
1	Rope (polyester or polypropylene)	0,008 /mb
2	Belying cleat	0,026

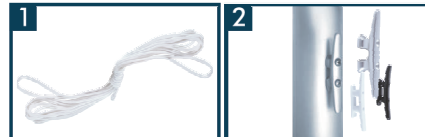

INSTALLATION ELEMENT		WEIGHT [kg]
1	Steel zinced hear shaped base For car tire	3,4
2	Steel zinced round base for usage with extra ballast	6,15
3	Aluminum ground sleeve 50mm For foundation	0,4
4	Steel zinced base for screwing into the ground For installation in soil (ground, mud, sand)	1,48
5	Steel base 48cm x 48cm with sleeve 50mm For indoor use	15



	Height [m]	3,1	4,1	6
Number of sections [pcs]		3	4	6
Flagpole diameter (top/bottom) [mm]		50	50	50
Net weight without accessories [kg]		2,7	3,9	5,2
Recommended size of the flag [m]		1,2 x 2 [2,4 m ²]	1,2 x 2 [2,4 m ²]	1,2 x 2 [2,4 m ²]
Size of transport package [cm] ±5%		140x11x11	140x22x22	140x30x20